

Ref:

ORLIB1M-SC

Item No: ORLIB – 14245

orlight[®]
FROM SOURCE TO SITE

Architectural square downlight featuring die-cast Aluminium construction, anti-glare baffle, and magnetic lamp change mechanism. Facilitates 360 degree rotation and tilt capability. Circular cutout allows for ease of installation. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE


LOR	58
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	100 MM
Width / Depth	100 MM
Height	55 MM
Cutout	90 MM
Weight	0.265KG
Tilt	20°
Rotation	360°
Finish	SATIN CHROME
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

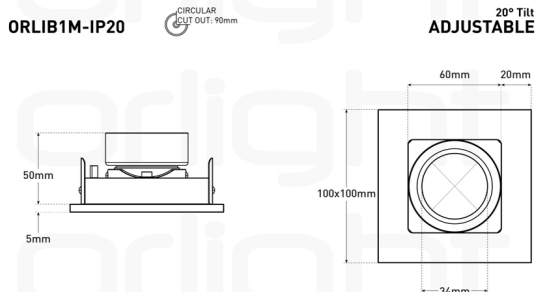

ORLIB1M-SC


Item No: ORLIB – 14245

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS


ORLIB1M-IP20 with **LED ENGINES**  CIRCULAR CUT OUT: 90mm

ADJUSTABLE - 20° Tilt
Allow +5mm for Cable Clearance

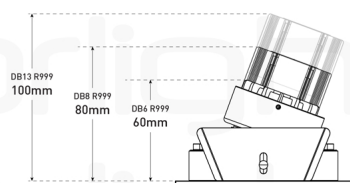

ORLIB1M-IP20 with **GU10 LAMPS**  CIRCULAR CUT OUT: 90mm

ADJUSTABLE - 20° Tilt
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORLIB1M-SC

Item No: ORLIB – 14245

orlight[®]
FROM SOURCE TO SITE



DB13-R999


ACCESSORIES



MC2-SL
11911
Slim Spring Mains Converter for Orlight
Magnetic series



MC2-SL-WL
11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



LOUVRE-HC
11753
Honeycomb Louvre