

Ref:

# ORL019MAXI-IP54-AW-NL

Item No: ORL019MAXI – 12808

**orlight**  
FROM SOURCE TO SITE

Architectural miniature downlight, anti-glare baffle, minimal bezel, 70mm diameter, 360° rotation, 35° tilt, clip lamp change with removable fascia. Available as IP20 & IP54. Not suitable for use with conical fire hoods — contact the sales office for fire hood specification. Independently tested and certified for 90-minute fire resistance in solid joist constructions when used with Diablo LED engines. Orlight does not recommend cutting holes before product is received.





## DIMENSIONS

ORL019MAXI-IP54



35° Tilt  
ADJUSTABLE



## OPTICAL PERFORMANCE

|     |    |
|-----|----|
| LOR | 58 |
|-----|----|

## CONSTRUCTION

|                         |                        |
|-------------------------|------------------------|
| Installation            | RECESSED               |
| Construction            | ALUMINIUM              |
| Diameter                | 70 MM                  |
| Height                  | 64 MM                  |
| Cutout                  | 63 MM                  |
| Weight                  | 0.09KG                 |
| Tilt                    | 35°                    |
| Rotation                | 360°                   |
| Finish                  | ALL WHITE              |
| RAL                     | RAL 9016               |
| IP Rating               | IP54                   |
| Fire Rated              | YES                    |
| Fire Rating             | 90 MINS - SOLID JOIST  |
| Fire Rated With         | DIABLO RETROFIT ENGINE |
| Fire Test Report        | <a href="#">424737</a> |
| Compatible Light Source | GU10 / ENGINE          |
| Lamp Change             | REMOVAL OF FASCIA      |

## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | REMOTE    |

# ORL019MAXI-IP54-AW-NL


Item No: ORL019MAXI – 12808

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## ADDITIONAL DIMENSIONS


ORL019MAXI-IP54 with  **LED ENGINES** CIRCULAR CUT OUT: 63mm

**ADJUSTABLE - 35° Tilt**  
Allow +5mm for Cable Clearance

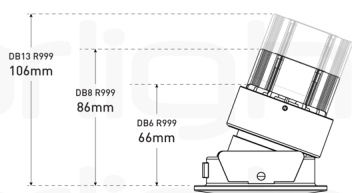

ORL019MAXI-IP54 with  **GU10 LAMPS** CIRCULAR CUT OUT: 63mm

**ADJUSTABLE - 35° Tilt**  
Allow +20mm for Cable Clearance



## COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

## COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

# ORL019MAXI-IP54-AW-NL

Item No: ORL019MAXI – 12808

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE



**DB13-R999**


## ACCESSORIES



**MC3**  
11924  
Standard Mains Converter for ORL019MAXI



**MC3-WL**  
11925  
Standard Mains Converter for ORL019MAXI  
with flex



**LOUVRE-HC**  
11753  
Honeycomb Louvre